


NO.112140

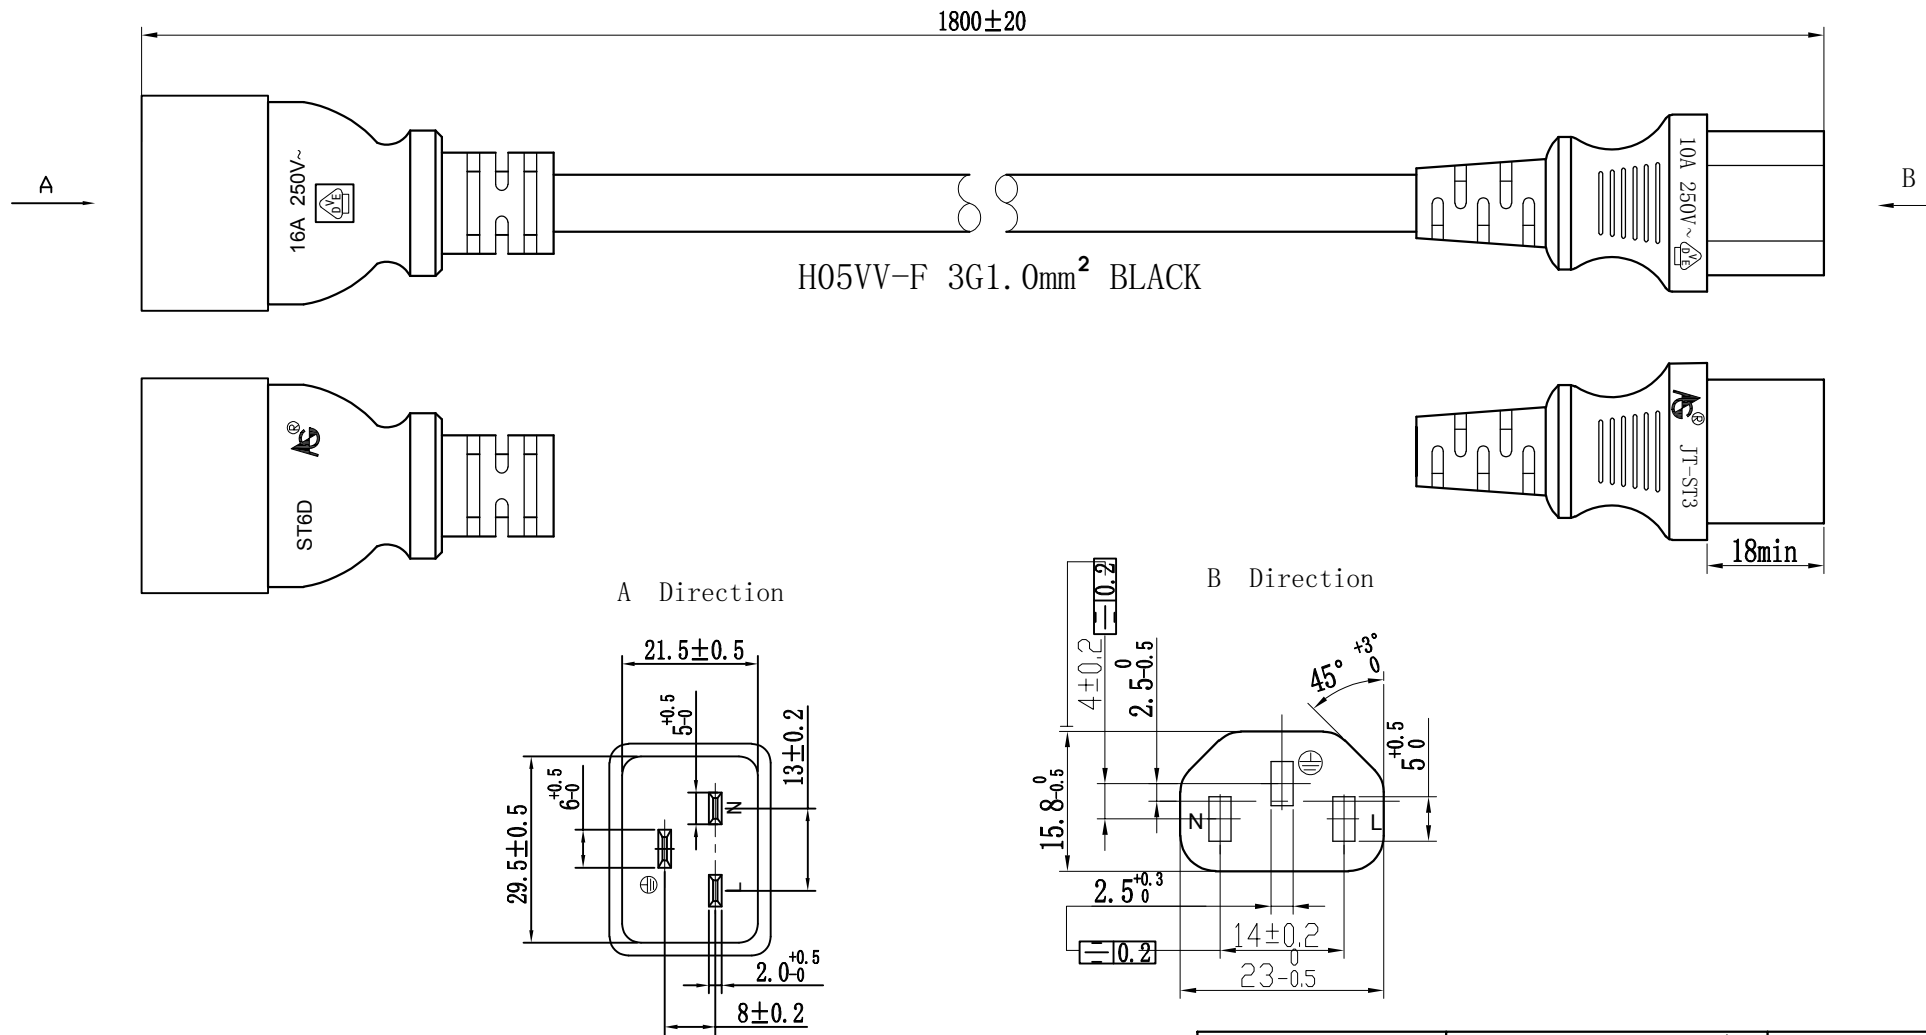

Notes:

1.Plug:ST6D/JT-ST3 Clear injection no scrath and dirt;

2. Cable:H05VV-F 3G1.0mm² Jacket $\phi 7.0 \pm 0.2$ Conductor $32 * 0.198 \pm 0.004$ Core $\phi 2.6 \pm 0.1$;

Cable Mark: $\triangleleft$ VDE $\triangleright$ H05VV-F 3G1.0mm² ZHEJIANG JINTONG NUCLEAR CABLE CO., LTD

3. Test: Hi-pot: Inner Voltage AC2500V/1S External Voltage AC4000V/1S
current leakage 1mA, insulation resistance no less than $5M\Omega$, no strike out;

TOLERANCE ACCORDING TO THIS FORM UNLESS OTHERWISE DELEGATED		第二角度投影 THE THIRD ANGLE PROJECTION		第X张 共X张 第X张 共X张	
尺寸标注 DIMENSION	TOLERANCE		版本 VERSION	比例 PROPORTION	1:4:1
	长度 LENGTH	角度 ANGLE	文件位置 FILE LOCATION		单位 UNIT
<200	±0.1	±0.5°			mm
200~500	±0.3				
500~800	±0.5				
<800	±1.0				
设计 DESIGN					材料材料 RESIN MATERIALS
审核 AUDIT					检查者 CHECKER
批准 APPROVAL					