


NO.

标记	处数	分区	更改	日期

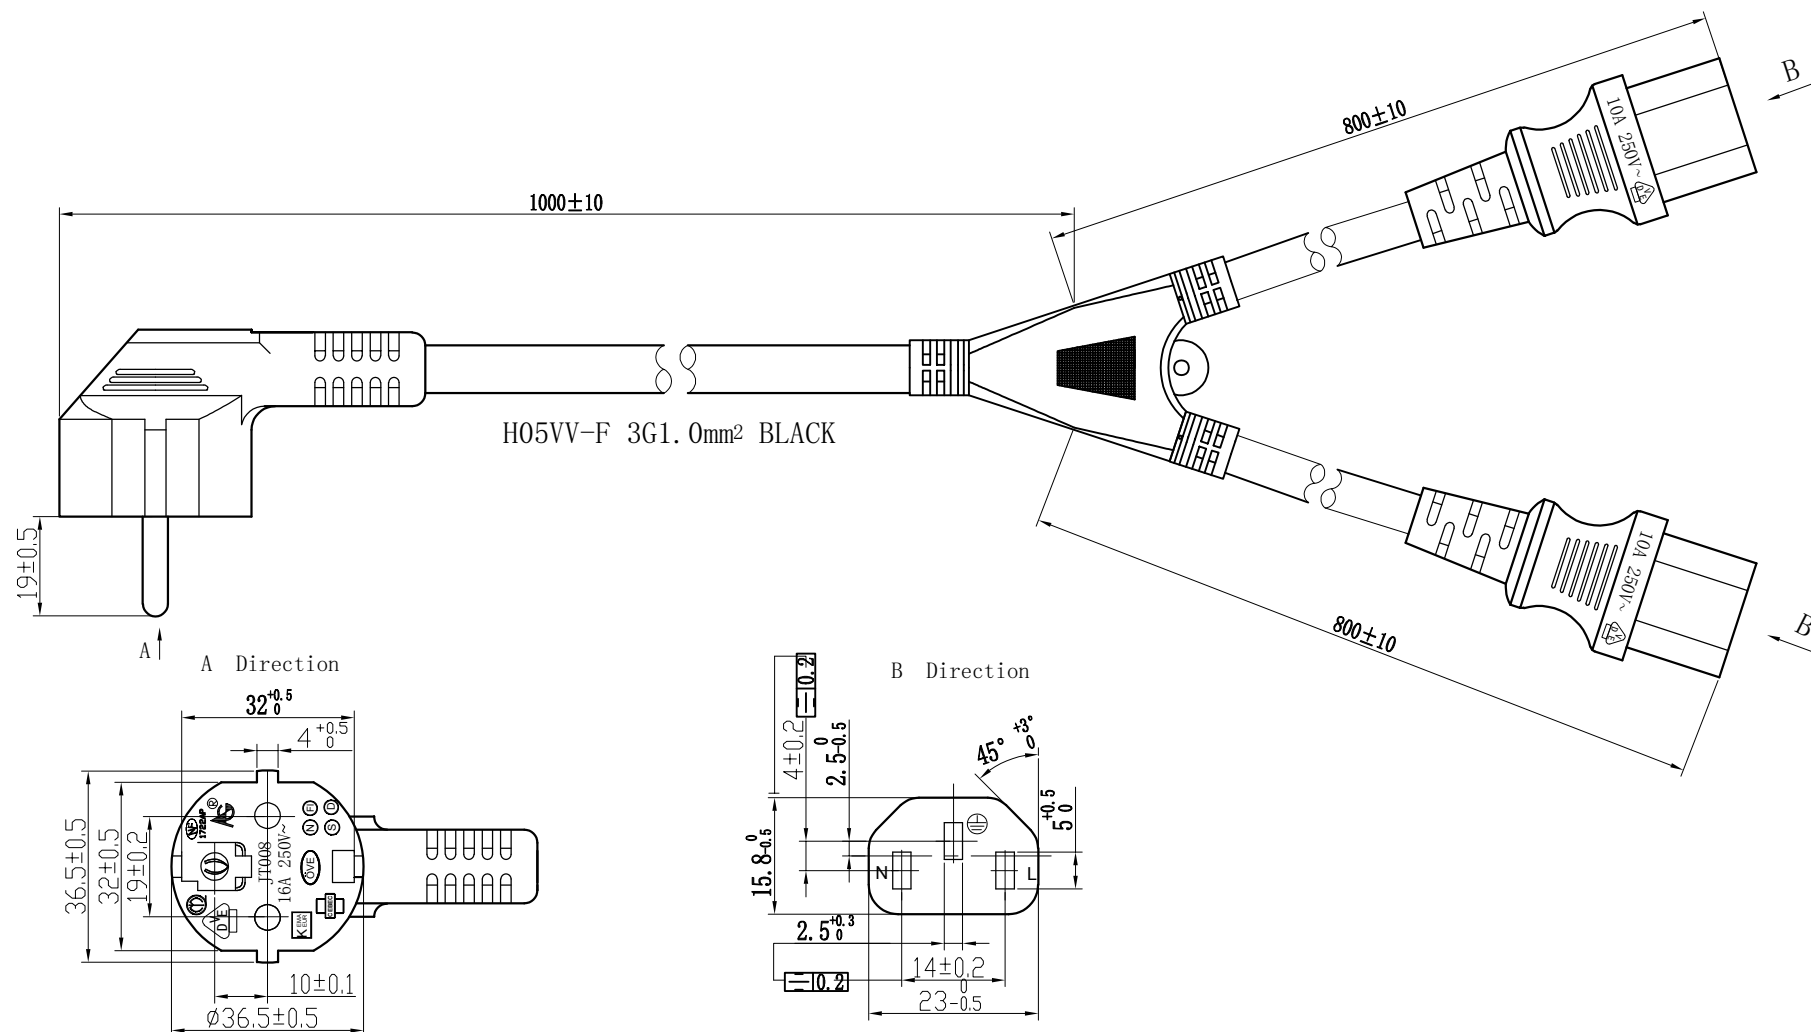

Notes:

1. Plug: JT008/JT-ST3+JT-ST3 Clear injection no scratch and dirt;
2. Cable: H05VV-F 3G1.0mm² Jacket $\phi 7.0 \pm 0.1$ Conductor $32 \times 0.198 \pm 0.004$ Core $\phi 2.6 \pm 0.1$
Cable Mark: <VDE> H05VV-F 3G1.0mm² ZHEJIANG JINTING NUCLEAR CABLE CO., LTD
3. Test: Hi-pot: Inner Voltage AC2500V/1S External Voltage AC4000V/1S
current leakage 1mA, insulation resistance no less than 5M Ω , no strike out;

TOLERANCE ACCORDING TO THIS FORM - UNLESS OTHERWISE SPECIFIED		第三角度投影 THE THIRD ANGLE PROJECTION		第X张 共X张	
尺寸标注 DIMENSION	TOLERANCE	版本 VERSION	比例 PROPORTION	单位 UNIT	材料 MATERIAL
长度 LENGTH	角度 ANGLE	A	1:1	mm	A4
<200	± 0.1	图号 FILE LOCATION			
200~500	± 0.3	图号 FIGURE NO			
500~800	± 0.5	图号 FIGURE NO			
<800	± 1.0	图号 FIGURE NO			
设计 DESIGN	王结安	产品名称 PRODUCTOR NAME	112220		
审核 AUDIT					
批准 APPROVAL					