


NO.

标记	处数	分区	更改	日期

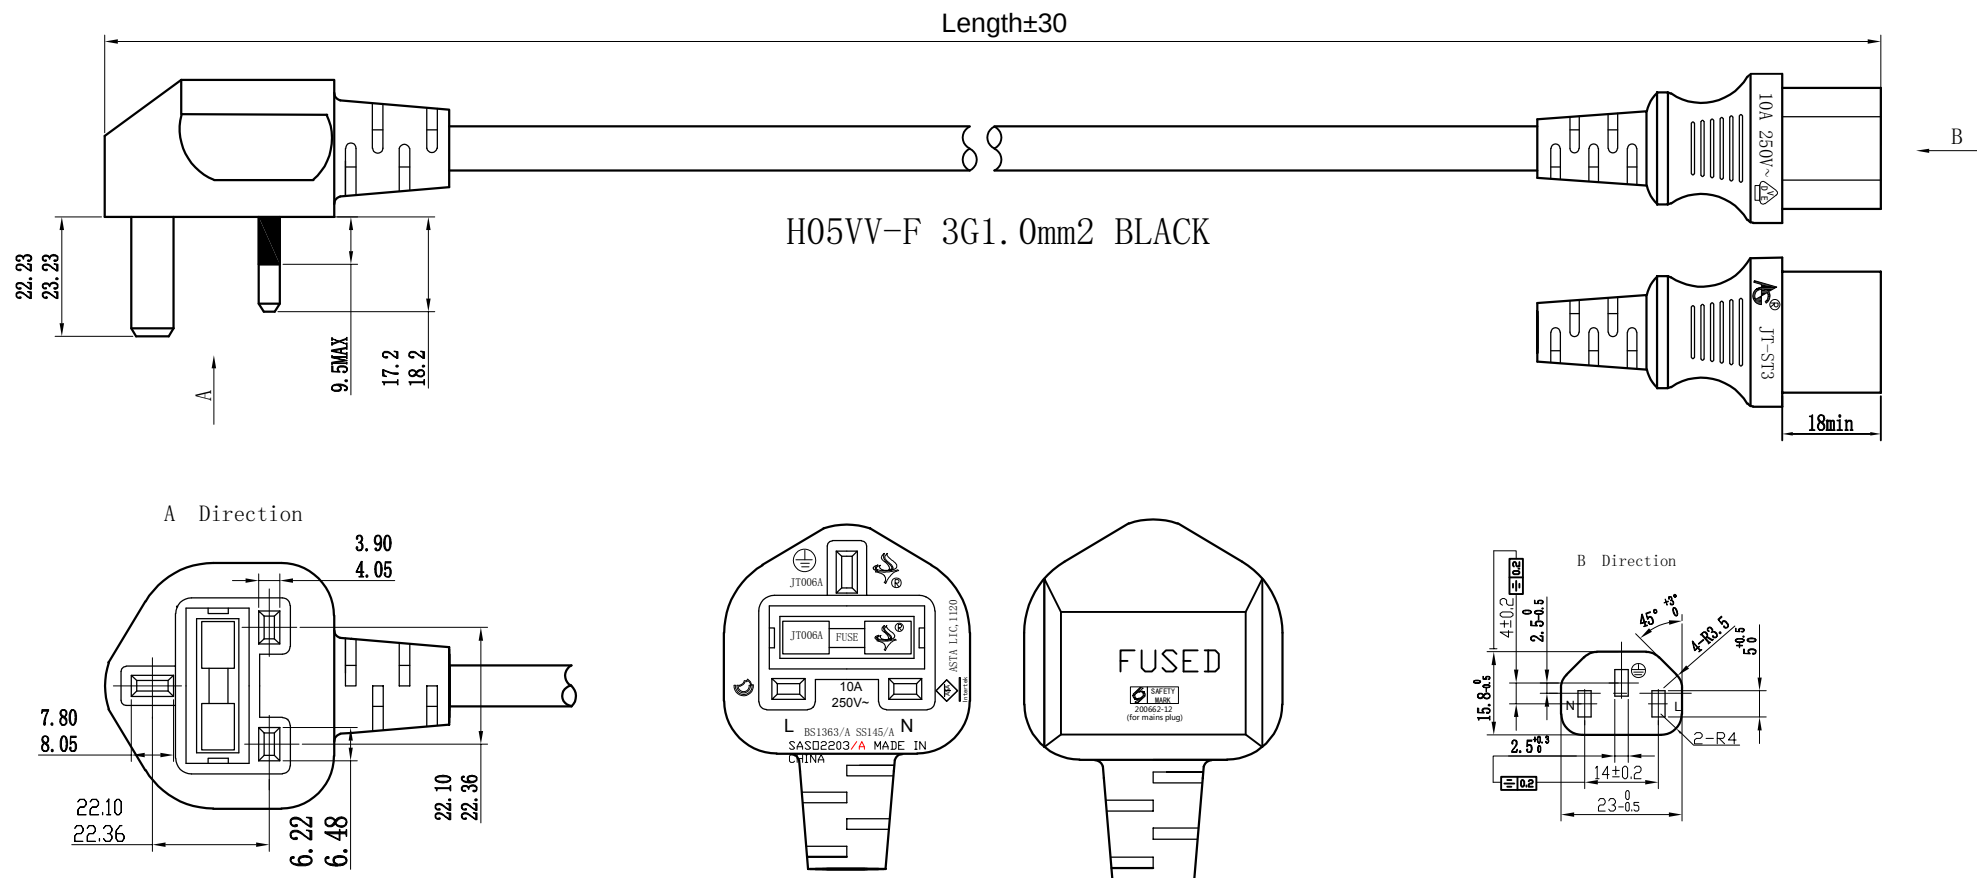

	112301	112302	112303	112304
LENGTH(mm)	3000	5000	7500	10000

Notes:

- Plug: JT006A Clear injection no scratch and dirt;
- Cable: H05VV-F 3G1.0mm² Jacket $\phi 7.0 \pm 0.1$ Conductor $32 \times 0.198 \pm 0.004$ Core $\phi 2.6 \pm 0.1$
Cable Mark: $\triangle VDE \triangle$ H05VV-F 3G1.0mm² ZHEJIANG JINTONG NUCLEAR CABLE CO., LTD
- Test: Hi-pot: Inner Voltage AC2500V/1S External Voltage AC4000V/1S
current leakage 1mA, insulation resistance no less than 5M Ω , no strike out;

TOLERANCE ACCORDING TO THIS FORM - UNLESS OTHERWISE SPECIFIED		第三角度投影 THE THIRD ANGLE PROJECTION		第X张 共X张	
尺寸标注 DIMENSION	TOLERANCE	版本 VERSION	比例 PROPORTION	单位 UNIT	纸张 PAPER
长度 LENGTH	角度 ANGLE	A	1:1	mm	A4
<200	± 0.1	比例 PROPORTION			
200~500	± 0.3	文件位置 FILE LOCATION			
500~800	± 0.5	图号 FIGURE NO			
<800	± 1.0	图号 FIG. NO.			
设计 DESIGN	王结安	产品名称 PRODUCTOR NAME			
审核 AUDIT					
批准 APPROVAL					

