


**Equip Basic Flex 19" Free
Standing Network Cabinet,
42U, 600x600mm, with Glass
Door, Removable and
Lockable Panels, Assembled,
RAL9005 Black**



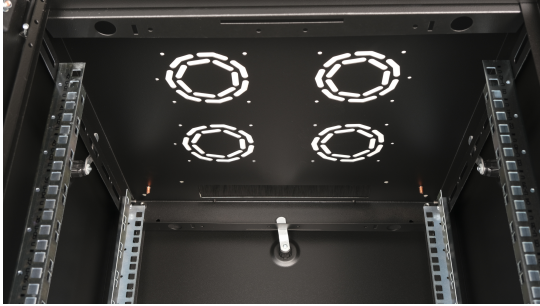

Short Description

- 42U cabinet, designed for optimal performance in every space
- 600X600MM Network Cabinet
- Ships preassembled for easy setup at your location
- The cabinet comes with a sleek glass frontdoor to elegantly showcase your equipment
- Sidepanels are removable and lockable
- Backpanel is removable

Description

These cabinets, of the Basic Flex Line, are engineered for the efficient and user-friendly installation of both active and passive network components, prioritizing streamlined cable management. Crafted from steel sheets up to 1.5 mm thick, every cabinet guarantees excellent stability, attributed to a unique plate curving technique, forming a sturdy steel framework. They are finished with a powder coating in shades of grey (RAL 7035) and black (RAL 9005). For challenging set-up locations that are less accessible, the cabinet is designed to be disassembled. The doors are easily detachable, and their stops can be switched between right and left orientations. Additionally, the roof is prepped for the integration of an air ventilation unit. Inside, each cabinet houses two sets (4 pieces) of 483 mm (19") profile rails. These rails, galvanized and marked with height units readable from both directions, are adjustable in depth. To facilitate extensive equipment installations, they're paired with supplementary depth support bars. Cable management is central to the design. The cabinet base features a punched-out cable entry shielded with a metal plate. For the broader 800 mm width cabinets, there are added punched-out cable entries covered with plastic on both sides. These entries are replicated on the roof, with a single one for 600 mm width cabinets and three for the 800 mm width ones. To cater to diverse operational needs, a wide assortment of accessories, including cable management tools and shelves, is readily available.

Additional Information

Wall mountable.	No
Number of cartons per pallet.	1 piece
Pallet Net Weight.	6800 gram
Pallet Gross Volume.	69360 cubic_centimeter
Package Volume.	49708000 cubic_centimeter
Maximum number of stacking cartons.	1 piece
Pallet Net Depth.	680 millimeter
Pallet Net Width.	680 millimeter
Pallet Net Height.	150 millimeter
Manual.	Yes
Mounting kit.	No
Max. Weight Capacity.	600 kilogram
Key lock.	Yes
Housing Material.	Steel
Back Door Key Lock.	Yes
Front Door Key Lock.	Yes
Side panels included.	Yes
Rack rail thickness.	1.5 millimeter
Stabilizing foot screw.	Yes
Number of stabilizing foot screws.	4 piece
Adjustable stand.	No
Monitoring.	No
Main PDU.	No
Side Panel Key Lock.	Yes
Product design.	4-Post
Cooling type.	Passive

Front Door Opening Angle.	200 degree
Removable Side Panels.	Yes
Castor wheels.	No
Rack rails.	Yes
Frame type.	Closed
Feet adjustment.	30 millimeter
Assembly Required.	No
Soundproof.	No
Built-in UPS.	No
Rack Type.	Freestanding rack
Rack capacity.	42U
Removable Back Door.	No
Removable Front Door.	Yes
Max. Weight Capacity On Wheels.	600 kilogram
Back Door Construction.	Steel
Front Door Construction.	Glass
Side Panel Construction.	Steel
Number of Layers per Pallet.	1 piece
Pallet Gross Weight.	83400 gram
Harmonized System (HS) code.	853710
Customs product code (TARIC).	8537109899
Carbon Footprint.	12.4146 kilogram
Quantity per Pallet.	1 piece
Sustainability Compliance.	Yes
Screws included.	No
Wall mounting kit.	No
Temperature sensor.	No

Quantity per Pack.	1 piece
Plinth panel.	No
Nuts included.	No
Package Depth.	680 millimeter
Package Height.	2150 millimeter
Package Width.	680 millimeter
Grounding kit.	Yes
Quick installation guide.	No
Product Gross Weight.	4000 gram
Adjustable feet.	Yes
Adjustable depth.	No
Cable management.	No
Preassembled.	Yes
Package Content.	Grounding set
Color.	Black
RAL Code.	RAL9005
Model Number.	EBF-42-6060-B-BAAA
Rail to Rail Length.	19 inch
Product Height.	2010 millimeter
Product Width.	600 millimeter
Product Depth.	600 millimeter
Material Thickness.	79.5 millimeter
Internal Height.	1867 millimeter
Internal Width.	595 millimeter
Min. Rack Depth.	290 millimeter
Max. Rack Depth.	550 millimeter
Internal Depth.	595 millimeter

Product Net Weight.

72600 gram

