
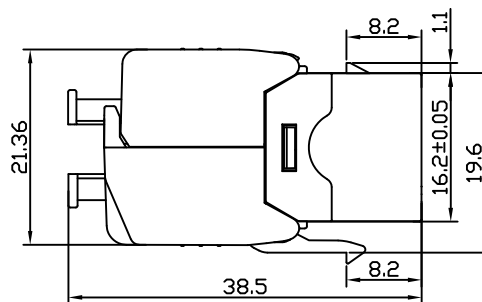
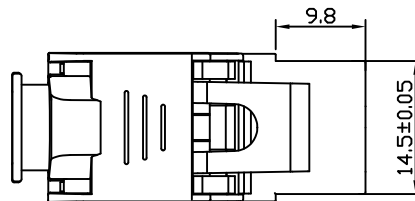



Dust cover top
adhesive
Layout diagram



NOTES:

ELECTRICAL:



1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO+85°
2. OPERATION:0° TO70°

MECHANICAL:

1. THE SHELL MATERIAL: ZINC ALLOY
2. HOUSING MATERIAL:ABS
3. INSERT MATERIAL:FAME RETARDANCY PBT
4. PCB MATERIAL:FR-4 T=1.6mm
5. CONTACT MATERIAL:PHOSPHOR BRONZE STAMP
PIN T=0.30mm
6. IDC CONTACT MATERIAL:PHOSPHOR BRONZE
T=0.50mm WITH TIN PLATING
7. RJ45 JACK ;LIFE:750 TIMES MIN
8. IDC LIFE:200 FTIMES MIN
9. WIRE:AWG 22-26

											
					Material					Item No.	
SYM	Number	Bill No. of Alteration	Signature	Date	Angles Projection		Size	Scale	Unit	Part Name	CAT8 Toolless Keystone jack, Shielded Type
							A4	X:1	mm		
Drawn	Ding jian bo	2018.9.20	Tolerance				A4	X:1	mm	ERP	
Checked	Ge pei jun	2018.9.20	0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20								
Approved	Wang wei jun	2018.9.20	100.00-Angle ±0.25 ±30°		Sheet		1 OF 1	Version: A/0		Part No.	