


NO.

标记	处数	分区	更改	日期

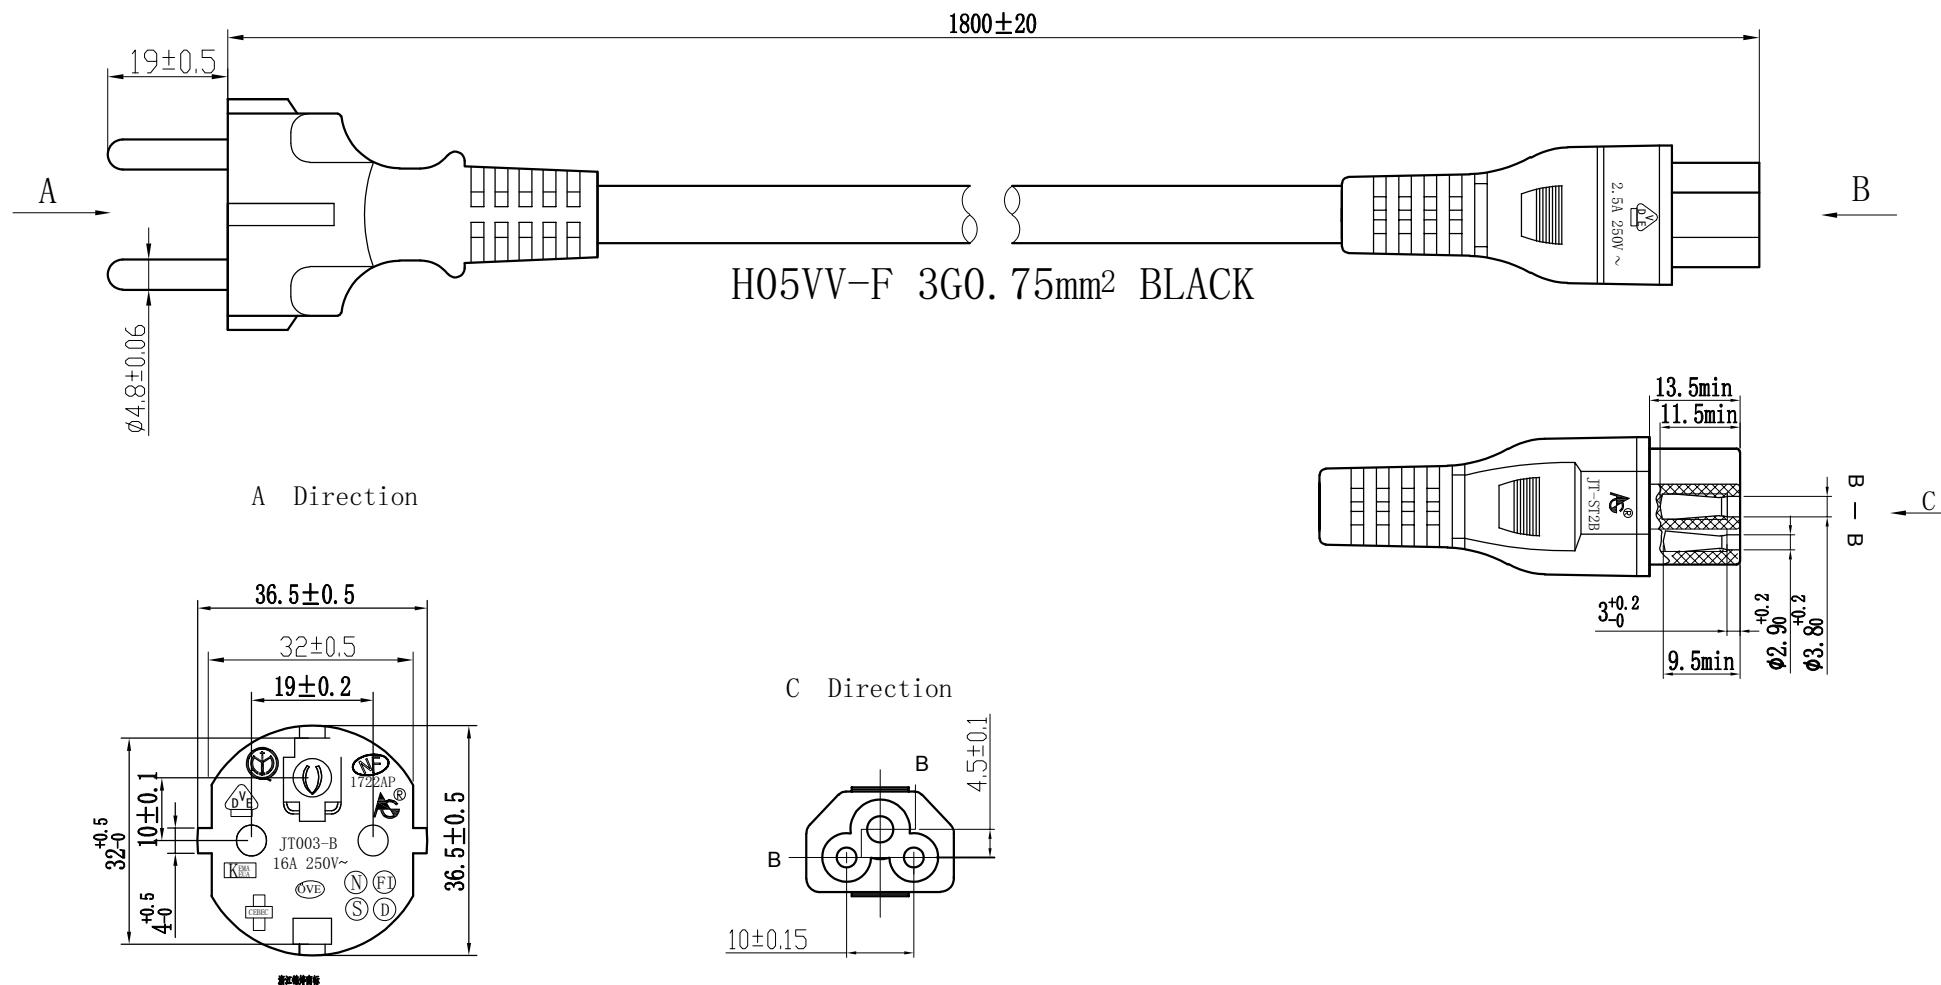

Notes:

- Plug: JT003-B/JT-ST2B Clear injection no scratch and dirt;
- Cable: H05VV-F 3G0.75mm² Jacket $\phi 6.5 \pm 0.2$ Conductor $24 \times 0.198 \pm 0.004$ Core $\phi 2.4 \pm 0.1$
Cable Mark: **<VDE>** H05VV-F 3G0.75mm² **AS** ZHEJIANG JINTING NUCLEAR CABLE CO., LTD
- Test: Hi-pot: Inner Voltage AC2500V/1S External Voltage AC4000V/1S
current leakage 1mA, insulation resistance no less than 5M Ω , no strike out;

尺寸标注 DIMENSION			第三角度投影 THE THIRD ANGLE PROJECTION			第X张 共X张		
TOLERANCE ACCORDING TO THIS FORM - UNLESS OTHERWISE DESIGNATED			版本 VERSION	比例 PROPORTION	1:1	单位 UNIT	mm	张数 SHEET
TOLERANCE								
长度 LENGTH			公差位置 FILE LOCATION					
<200	± 0.1	± 0.5°						
200~500	± 0.3							
500~800	± 0.5							
<800	± 1.0							
设计 DESIGN			产 品 名 称 PRODUCTOR NAME			树脂材料 RESIN MATERIALS		
审核 AUDIT						图 号 号 DRAWING		
批准 APPROVAL								
			112150			 equip®		

