


NO.112106

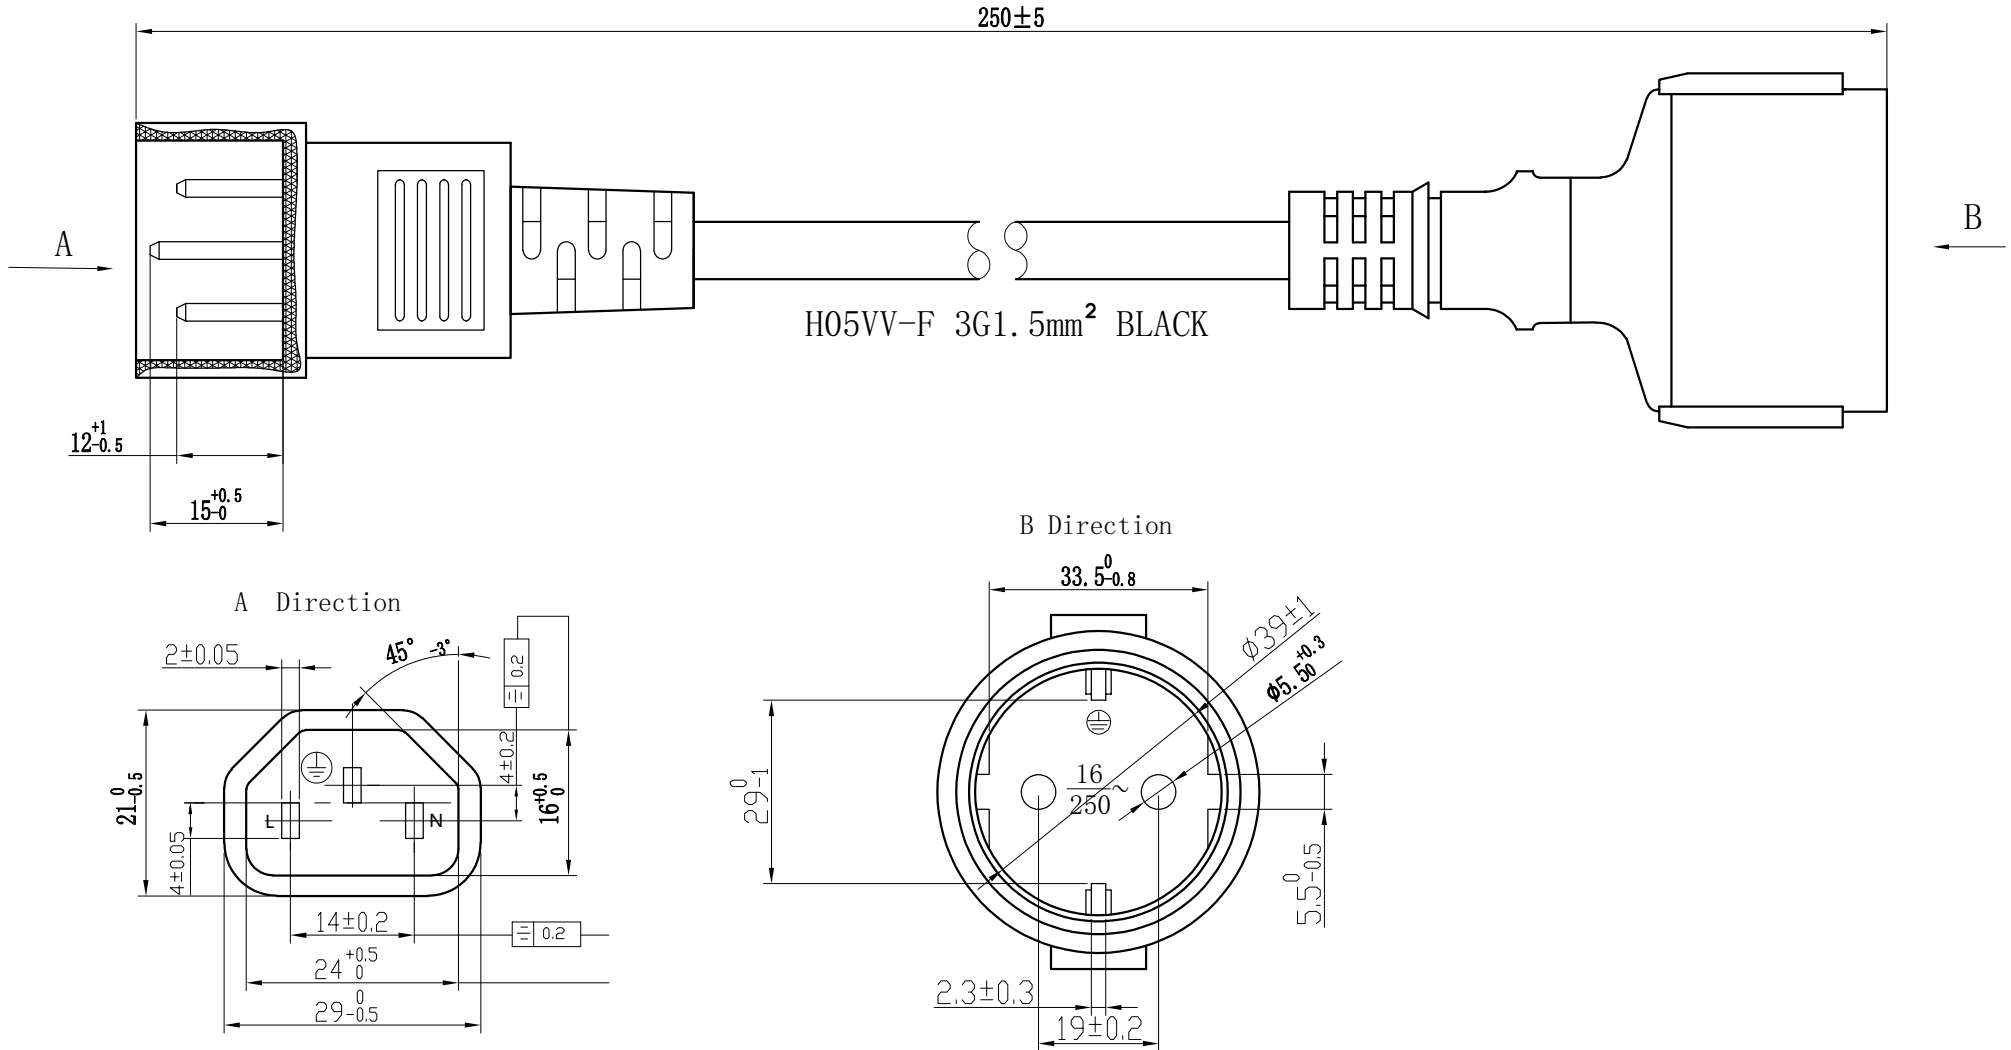

Notes:

- Plug: JT-SZ3/GZF3-16 Clear injection no scratch and dirt;
- Cable: H05VV-F 3G1.5mm² Jacket $\phi 8.0 \pm 0.2$ Conductor $48 \times 0.198 \pm 0.004$ Core $\phi 3.0 \pm 0.1$;
Cable Mark: <VDE> H05VV-F 3G1.5mm² ZHEJIANG JINTING NUCLEAR CABLE CO., LTD
- Test: Hi-pot: Inner Voltage AC2500V/1S External Voltage AC4000V/1S
current leakage 1mA, insulation resistance no less than 5M Ω , no strike out;

TOLERANCE ACCORDING TO THIS FORM - UNLESS OTHERWISE INDICATED			第三角度投影 THE THIRD ANGLE PROJECTION			第X张 共X张		
尺寸标注 DIMENSION	公差 TOLERANCE	公差 TOLERANCE	版本 VERSION	比例 PROPORTION	比例 PROPORTION	单位 UNIT	材料 MATERIAL	图号 DRAWING NO.
<200	± 0.1	$\pm 0.5^\circ$	图号 FIGURE NO.	A	1.4:1	mm	材料 MATERIAL	A4
200~500	± 0.3		图号 FIGURE NO.				材料 MATERIAL	
500~800	± 0.5		图号 FIGURE NO.				材料 MATERIAL	
<800	± 1.0		图号 FIGURE NO.				材料 MATERIAL	
设计 DESIGN			PRODUCTOR NAME		122106			
审核 AUDIT								
批准 APPROVAL								