


NO.

标记	处数	分区	更改	日期

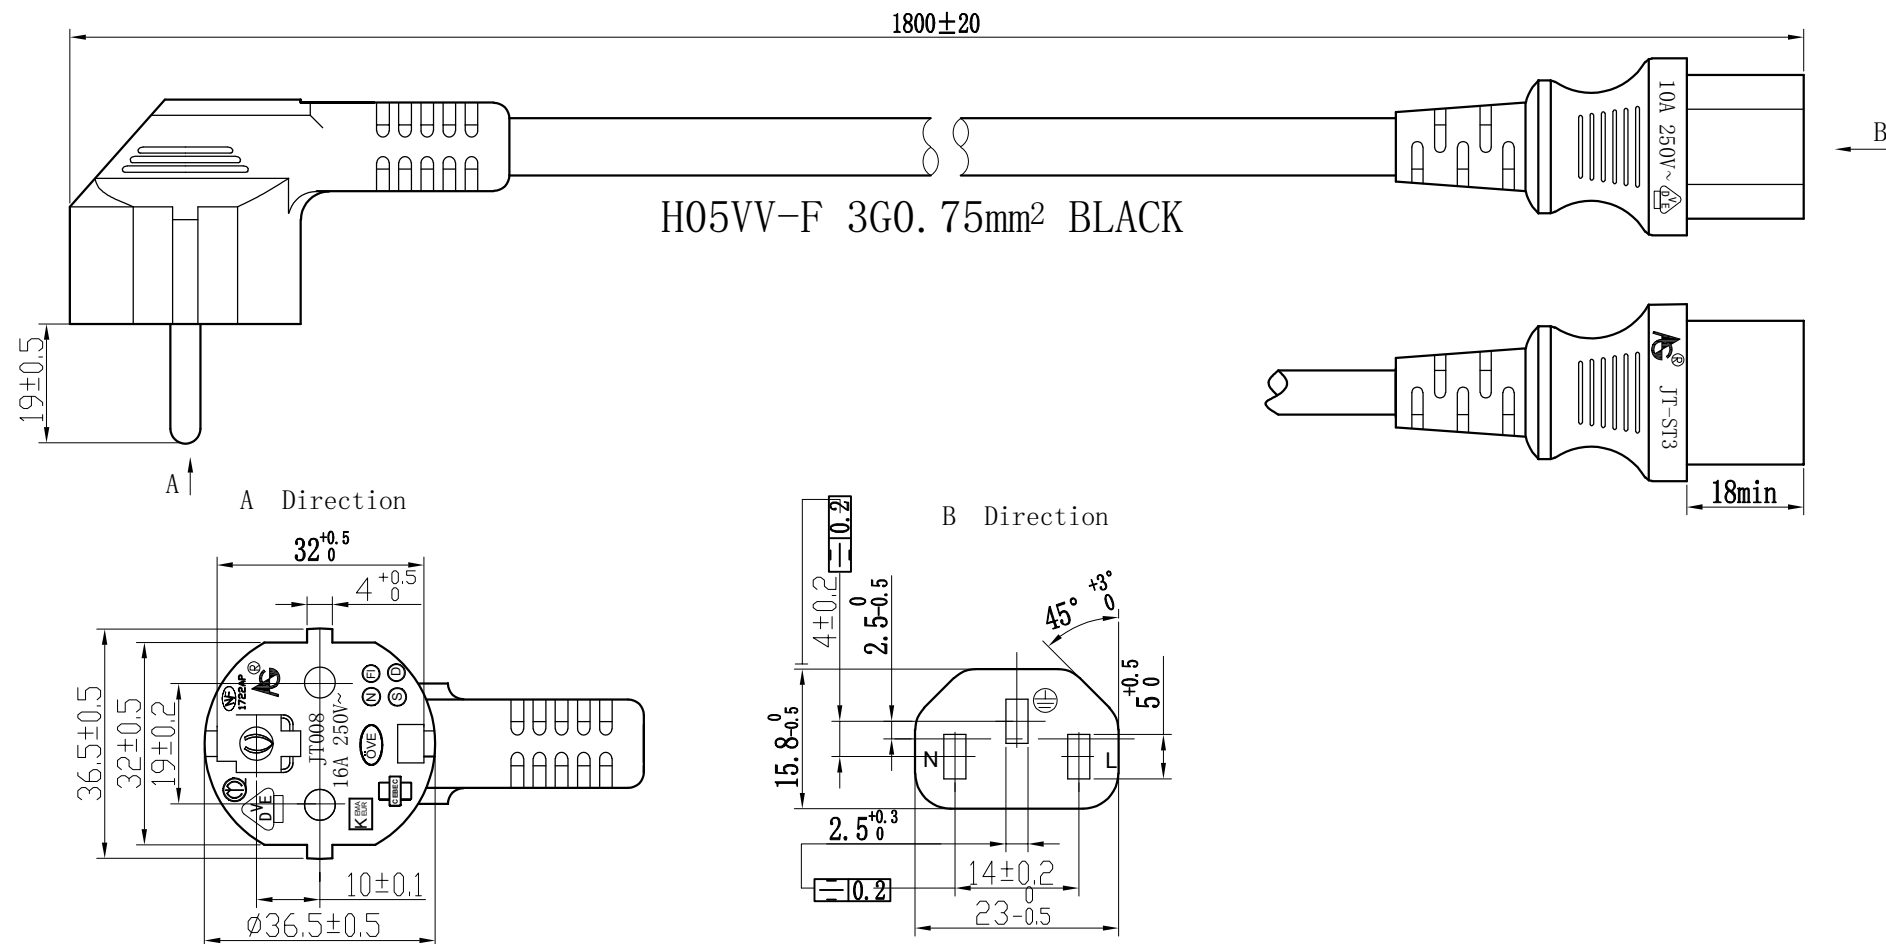

Notes:

- Plug:JT008/JT-ST3 Clear injection no scrath and dirt;
- Cable:H05VV-F 3G0.75mm² Jacket $\phi 6.5 \pm 0.2$ Conductor 24*0.198±0.004 Core $\phi 2.4 \pm 0.1$
Cable Mark:◁VDE▷ H05VV-F 3G0.75mm²  ZHEJIANG JINTING NUCLEAR CABLE CO.,LTD
- Test:Hi-pot:Inner Voltage AC2500V/1S External Voltage AC4000V/1S
current leakage 1mA,insulation resistance no less than 5MΩ,no strike out;

尺寸标注		第三角度投影		第X张 共X张	
TOLERANCE ACCORDING TO THIS FORM - UNLESS OTHERWISE INDICATED		THE THIRD ANGLE PROJECTION			
尺寸标注	TOLERANCE	版本	比例	单位	图幅
LENGTH	ANGLE	A	PROPORTION	UNIT	MAPS
<200	±0.1	±0.5°	1:1	mm	A4
200~500	±0.3	FILE LOCATION			
500~800	±0.5	FIGURE NO		材料名称	
<800	±1.0	FIG. NO.		RESIN MATERIALS	
DESIGN		产品名称	112120	名称	
PROD		PRODUCTOR NAME		规格	
APPROVAL				图例	