

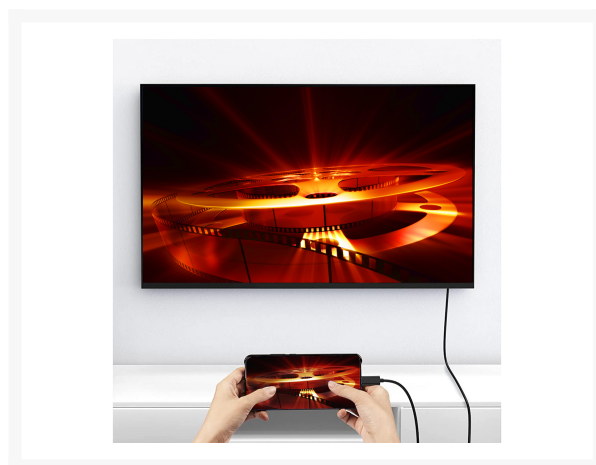


133421 USB-C to DisplayPort Premium Cable, M/M, 1.0m, 8K/60Hz

Product Images

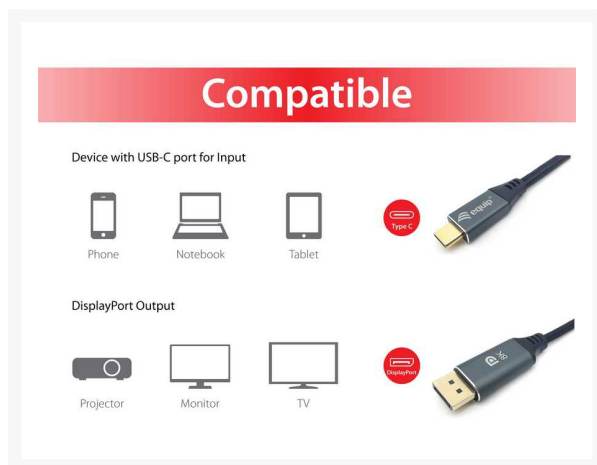

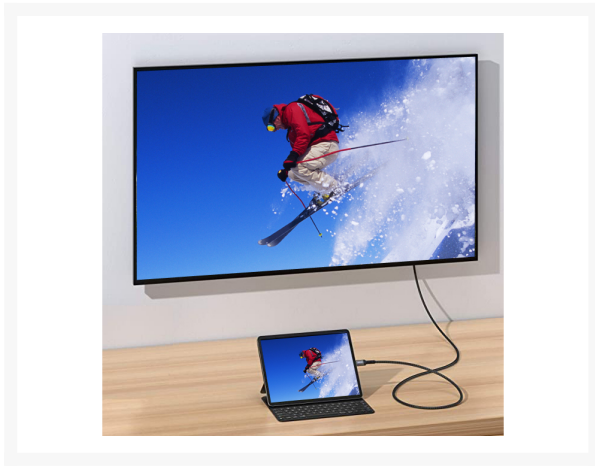

Short Description

- USB-C Male (Compatible with TB3/TB4)
- DisplayPort 1.4 Male
- Supports video resolutions up to 8K/60Hz
- Support resolution up to 7680x4320 @ 60 Hz
- Plug-and-Play installation
- USB-C port with DisplayPort Alternate Mode (DP Alt Mode) is needed
- Gold-plated connectors
- Aluminum casing
- Geflochtenes Baumwollnetz
- Jacket: Premium braided Cotton mesh
- Resolution up to below (depending on the system and the connected hardware)

Data transfer without DSC (display stream compression).

8k: 7680 x 4320 @ 30 Hz.
 5k: 5120 x 2880 @ 60 Hz.
 4k: 3840 x 2160 @ 144 Hz.
 2k: 2560 x 1440 @ 240 Hz.
 1080P: 1920 x 1200 @ 240 Hz.

Data transfer with DSC support. (display stream compression).

8k: 7680 x 4320 @ 60 Hz (DSC).
 5k: 5120 x 2880 @ 120 Hz (DSC).
 4k: 3840 x 2160 @ 240 Hz (DSC).

Description

The Equip® USB-C to DisplayPort adapter cable offers a convenient solution for directly connecting your USB-C™ device to your DisplayPort monitor or projector, Quality and stable transmission, gold-plated joints do not rust, say goodbye to water ripple stable transmission

Additional Information

Harmonized System (HS) code.	853690
Customs product code (TARIC).	8536901000
Angled Plug.	No
Max. Resolution.	8K/60Hz
Connector 1.	USB-C, male
Connector 2.	DisplayPort, male
Cable Length.	1m
Dimensions (W x D x H).	4.5 x 4.5 x 1000 mm
Product weight (kg).	0.05
Cable Jacket material.	PVC
Conductor size (AWG).	32AWG
Material.	Aluminum
Standards.	DisplayPort 1.4
Video Output Port.	DisplayPort
Approval and Compliance.	CE, RoHS
Operating temperature.	0°C ~ 40°C
Package Contents.	USB-C to DisplayPort Premium Cable
Color.	Black
EAN.	4015867228739
Model Number.	133421

